
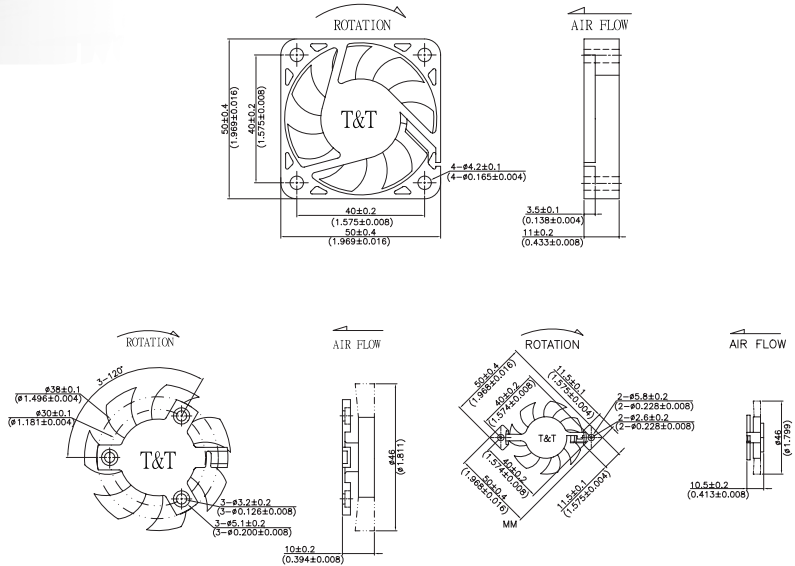
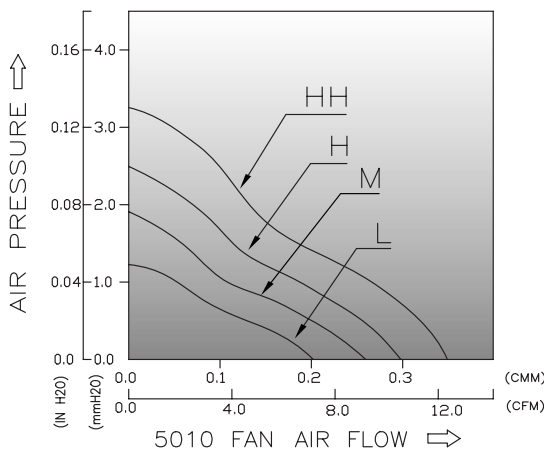


DC BRUSHLESS FAN

5010 Series (50x50x10/mm)

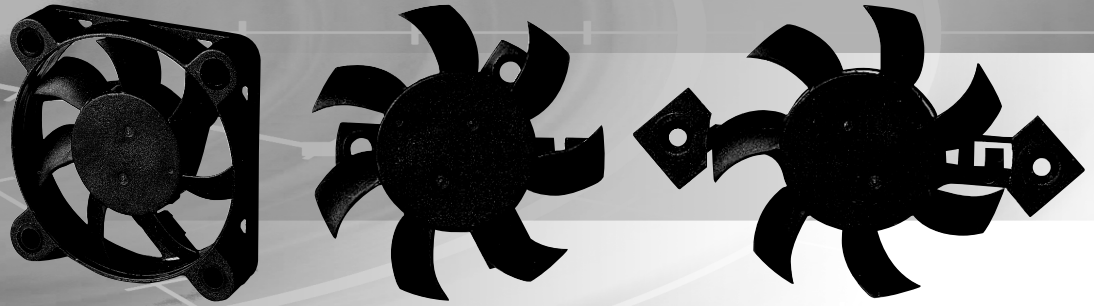

BRIEF SPECIFICATIONS

MODEL NO	RATED VOLTAGE V	OPERATING VOLTAGE V	RATED CURRENT A	ACTUAL CURRENT A	RATED POWER W	RATED SPEED RPM	MAX. AIR FLOW		MAX. STATIC AIR PRESSURE		NOISE LEVEL dBA
							CMM	CFM	mmH ₂ O	InH ₂ O	
5010L05S/C/B/F	5	4.5~5.5	0.18	0.09	0.90	3400	0.205	7.22	1.18	0.047	21.9
5010M05S/C/B/F	5	4.5~5.5	0.24	0.13	1.20	4200	0.265	9.37	1.94	0.076	26.9
5010H05S/C/B/F	5	4.5~5.5	0.30	0.25	1.50	5000	0.297	10.48	2.50	0.099	30.7
5010L09S/C/B/F	9	7~10	0.10	0.07	0.90	3400	0.205	7.22	1.18	0.047	21.9
5010M09S/C/B/F	9	6~10	0.15	0.10	1.35	4200	0.265	9.37	1.94	0.076	26.9
5010H09S/C/B/F	9	6~10	0.20	0.14	1.80	5000	0.297	10.48	2.50	0.099	30.7
5010HH09S/C/B/F	9	6~10	0.25	0.20	2.25	5800	0.352	12.43	3.27	0.129	34.3
5010L12S/C/B/F	12	10.8~13.8	0.08	0.06	0.96	3400	0.205	7.22	1.18	0.047	21.9
5010M12S/C/B/F	12	9~13.8	0.11	0.09	1.32	4200	0.265	9.37	1.94	0.076	26.9
5010H12S/C/B/F	12	9~13.8	0.14	0.11	1.68	5000	0.297	10.48	2.50	0.099	30.7
5010HH12S/C/B/F (-)	12	9~13.8	0.21	0.16	2.52	5800	0.352	12.43	3.27	0.129	34.3
5010L24S/C/B/F	24	20~27.6	0.08	0.03	1.92	3400	0.205	7.22	1.18	0.047	21.9
5010M24S/C/B/F	24	20~27.6	0.10	0.05	2.40	4200	0.265	9.37	1.94	0.076	26.9
5010H24S/C/B/F	24	20~27.6	0.12	0.07	2.88	5000	0.297	10.48	2.50	0.099	30.7

Data Change Subject To Without Notice