
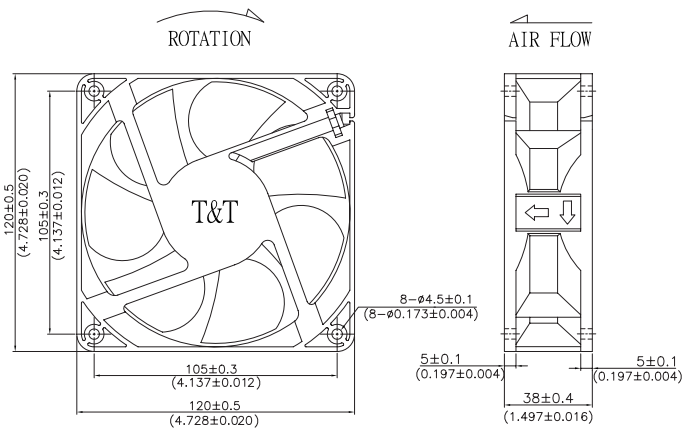


DC BRUSHLESS FAN

1238 Series (120x120x38/mm)

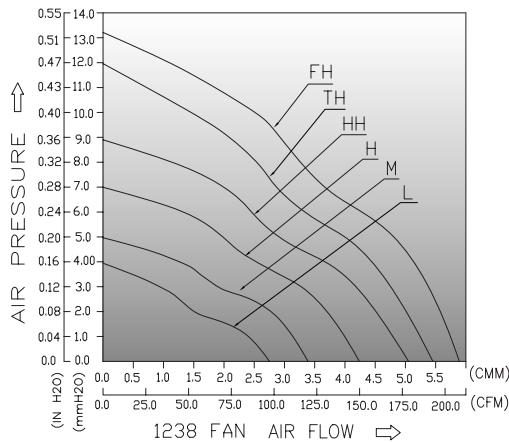

BRIEF SPECIFICATIONS

MODEL NO	RATED VOLTAGE V	OPERATING VOLTAGE V	RATED CURRENT A	ACTUAL CURRENT A	RATED POWER W	RATED SPEED RPM	MAX. AIR FLOW		MAX. STATIC AIR PRESSURE		NOISE LEVEL dBA
							CMM	CFM	mmH ₂ O	InH ₂ O	
1238L12B/S/F-	12	8~13.8	0.50	0.31	6.00	2000	2.752	97.19	3.94	0.155	38.4
1238M12B/S/F-	12	8~13.8	0.70	0.40	8.40	2400	3.389	119.68	4.97	0.196	42.6
1238H12B/S/F-	12	8~13.8	0.90	0.68	10.80	2800	4.237	149.64	6.99	0.275	48.2
1238HH12B-	12	8~13.8	1.50	0.88	18.00	3200	5.052	178.42	8.90	0.350	51.5
1238TH12B-	12	8~13.8	1.70	1.24	20.40	3600	5.454	192.60	11.96	0.471	54.1
1238FH12B-	12	8~13.8	1.85	1.80	22.20	4000	5.892	208.06	13.20	0.520	56.3
1238L24B/S/F-	24	12~27.6	0.30	0.16	7.20	2000	2.752	97.19	3.94	0.155	38.4
1238M24B/S/F-	24	12~27.6	0.40	0.23	9.60	2400	3.389	119.68	4.97	0.196	42.6
1238H24B/S/F-	24	12~27.6	0.50	0.40	12.00	2800	4.237	149.64	6.99	0.275	48.2
1238HH24B-	24	12~27.6	0.70	0.44	16.80	3200	5.052	178.42	8.90	0.350	51.5
1238L48B/S/F-	48	24~52.8	0.20	0.08	9.60	2000	2.752	97.19	3.94	0.155	38.4
1238M48B/S/F-	48	24~52.8	0.30	0.18	14.40	2400	3.389	119.68	4.97	0.196	42.6
1238H48B/S/F-	48	24~52.8	0.40	0.24	19.20	2800	4.237	149.64	6.99	0.275	48.2
1238HH48B-	48	24~52.8	0.50	0.31	24.00	3200	5.052	178.42	8.90	0.350	51.5

Data Change Subject To Without Notice