
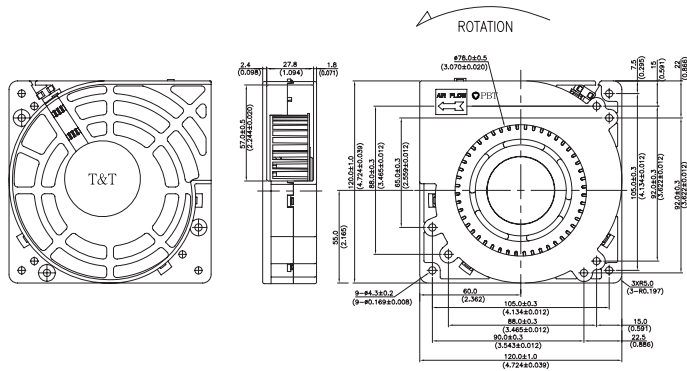


# DC BRUSHLESS FAN

B1232 Series (120x120x32/mm)

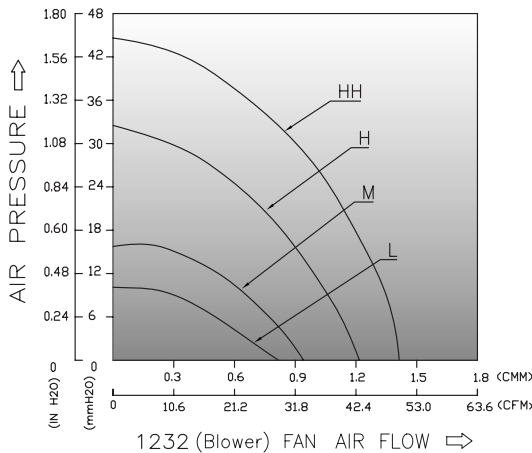

## BRIEF SPECIFICATIONS

MODEL NO	RATED VOLTAGE V	OPERATING VOLTAGE V	RATED CURRENT A	ACTUAL CURRENT A	RATED POWER W	RATED SPEED RPM	MAX. AIR FLOW		MAX. STATIC AIR PRESSURE		NOISE LEVEL dBA
							CMM	CFM	mmH <sub>2</sub> O	InH <sub>2</sub> O	
B1232L12B-	12	8~13.8	0.36	0.34	4.32	2000	0.819	28.92	10.10	0.398	47.9
B1232M12B-	12	8~13.8	0.80	0.63	9.60	2500	0.943	33.30	16.10	0.634	52.3
B1232H12B-	12	8~13.8	1.35	1.01	16.20	3000	1.246	44.01	32.90	1.295	56.1
B1232HH12B-	12	8~13.8	1.90	1.60	22.80	3500	1.402	49.52	45.70	1.799	60.9
B1232L24B-	24	12~27.6	0.24	0.20	5.76	2000	0.819	28.92	10.10	0.398	47.9
B1232M24B-	24	12~27.6	0.34	0.30	8.16	2500	0.943	33.30	16.10	0.634	52.3
B1232H24B-	24	12~27.6	0.90	0.81	21.60	3000	1.246	44.01	32.90	1.295	56.1
B1232HH24B-	24	12~27.6	1.20	1.02	28.80	3500	1.402	49.52	45.70	1.799	60.9
B1232L48B-	48	24~52.8	0.15	0.13	7.20	2000	0.819	28.92	10.10	0.398	47.9
B1232M48B-	48	24~52.8	0.24	0.20	11.52	2500	0.943	33.30	16.10	0.634	52.3
B1232H48B-	48	24~52.8	0.75	0.69	36.00	3000	1.246	44.01	32.90	1.295	56.1
B1232HH48B-	48	24~52.8	0.95	0.83	45.60	3500	1.402	49.52	45.70	1.799	60.9

Data Change Subject To Without Notice