
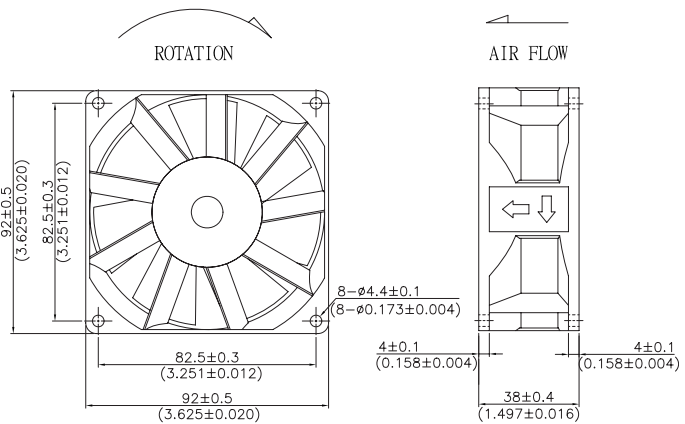
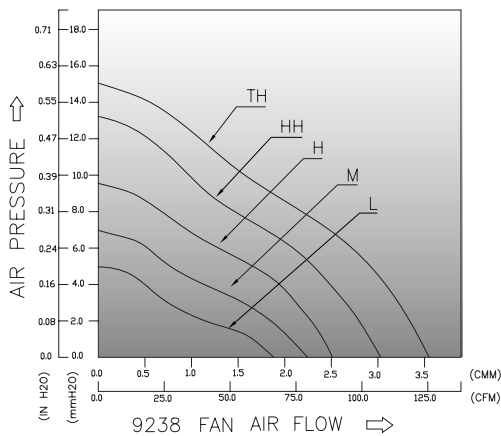


# DC BRUSHLESS FAN

9238 Series (92x92x38/mm)



## BRIEF SPECIFICATIONS

MODEL NO	RATED VOLTAGE V	OPERATING VOLTAGE V	RATED CURRENT A	ACTUAL CURRENT A	RATED POWER W	RATED SPEED RPM	MAX. AIR FLOW		MAX. STATIC AIR PRESSURE		NOISE LEVEL dBA
							CMM	CFM	mmH <sub>2</sub> O	InH <sub>2</sub> O	
9238L12B-	12	8~13.8	0.25	0.19	3.00	2600	1.882	66.46	4.88	0.192	39.9
9238M12B-	12	8~13.8	0.40	0.30	4.80	3200	2.245	79.29	7.10	0.280	45.6
9238H12B-	12	8~13.8	0.60	0.49	7.20	3800	2.513	88.73	9.77	0.385	49.9
9238HH12B-	12	8~13.8	0.90	0.61	10.80	4400	3.030	107.01	12.40	0.488	54.3
9238TH12B-	12	8~13.8	1.30	0.89	15.60	5000	3.549	125.34	14.42	0.568	57.9
9238L24B-	24	18~27.6	0.15	0.12	3.60	2600	1.882	66.46	4.88	0.192	39.9
9238M24B-	24	18~27.6	0.25	0.20	6.00	3200	2.245	79.29	7.10	0.280	45.6
9238H24B-	24	18~27.6	0.45	0.27	10.80	3800	2.513	88.73	9.77	0.385	49.9
9238HH24B-	24	18~27.6	0.60	0.31	14.40	4400	3.030	107.01	12.40	0.488	54.3
9238TH24B-	24	18~27.6	0.90	0.48	21.60	5000	3.549	125.34	14.42	0.568	57.9
9238L48B-	48	38~52.8	0.08	0.06	3.84	2600	1.882	66.46	4.88	0.192	39.9
9238M48B-	48	38~52.8	0.12	0.09	5.76	3200	2.245	79.29	7.10	0.280	45.6
9238H48B-	48	38~52.8	0.18	0.15	8.64	3800	2.513	88.73	9.77	0.385	49.9
9238HH48B-	48	38~52.8	0.35	0.29	16.80	4400	3.030	107.01	12.40	0.488	54.3
9238TH48B-	48	38~52.8	0.40	0.24	19.20	5000	3.549	125.34	14.42	0.568	57.9

Data Change Subject To Without Notice